
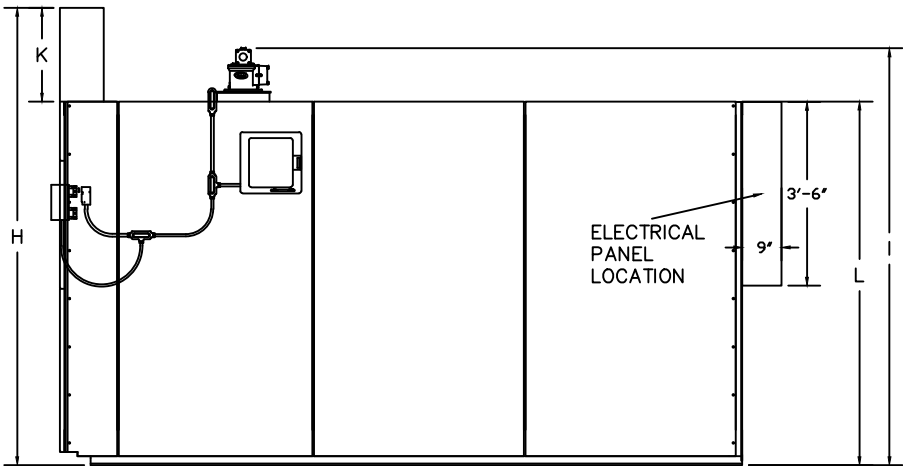
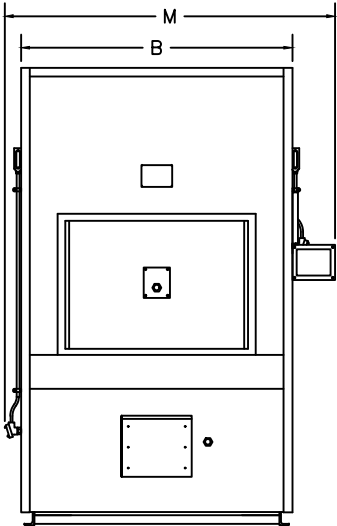
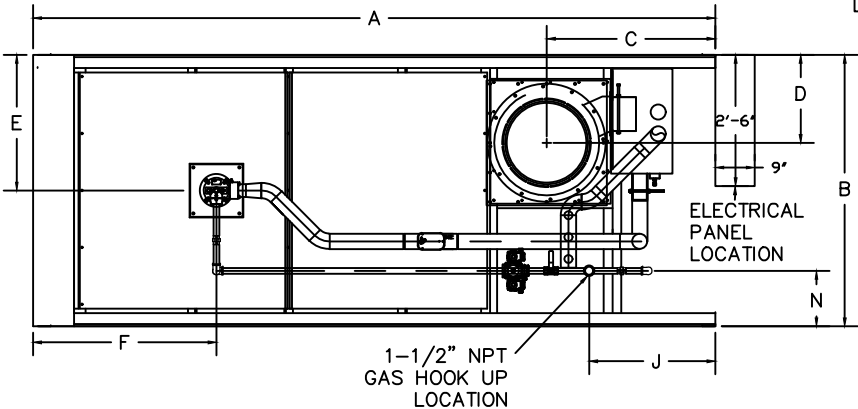


ELECTRICAL	
VOLTAGE	220/440 VOLTS
PHASE	SINGLE OR 3 PHASE
FREQ.	50/60HZ
AMPS	1 PHASE 70 AMP\3 PHASE 230v\40AMPS 440v\20AMPS
CHAMBER VOL.	
PRI. CHAMBER VOL.	73 CF (2.07 CM)
SEC. CHAMBER VOL.	71 CF (2.01 CM)

GAS	
NATURAL GAS PRESSURE	12"TO 15"W.C.(304MM TO 381MM)
PROPANE PRESSURE	11"W.C. (288MM)
FLOW RATE	2,000,000 BTU/HR
GAS HOOK UP	1-1/2" NPT
REQUIRED CLEARANCES	
SIDES	24"
REAR	39"
TOP	24"
AROUND STACK	8"

MACHINE DIMENSIONS	
A	157.00
B	62.00
C	38.50
D	19.875
E	31.00
F	42.375
G	67.125
H	104.50
I	95.25
J	30.00
K	21.375
L	83.00
M	75.50
N	14.50

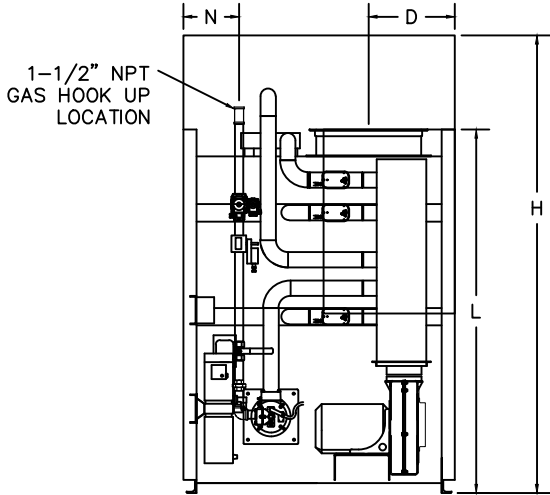

KELLER MANUFACTURING 4442 HOLDEN ROAD LAKELAND, FL. 33811 863-937-8928	DRAWN BY:	DATE	KMH-1100-200 MACHINE SPECIFICATIONS
	CHECKED	DATE	
	BLK		
THIS DRAWING IS THE PROPERTY OF KELLER. REPRODUCTIONS ARE KELLER'S SOLE PROPERTY. NO PART OF THIS DRAWING OR RELEASE OF DRAWINGS TO OTHERS DOES NOT ALLOW LICENSING IN ANY WAY.		JOB NO.	TITLE MACHINE SPECIFICATIONS
		MODEL NO.	
		KMH	
		PLOT SCALE	SIZE SHEET REV.
		NTS	